

Pulse Floor Tiles

SIZES



COLOURS



Bone




Shell



Chrome



Cinder

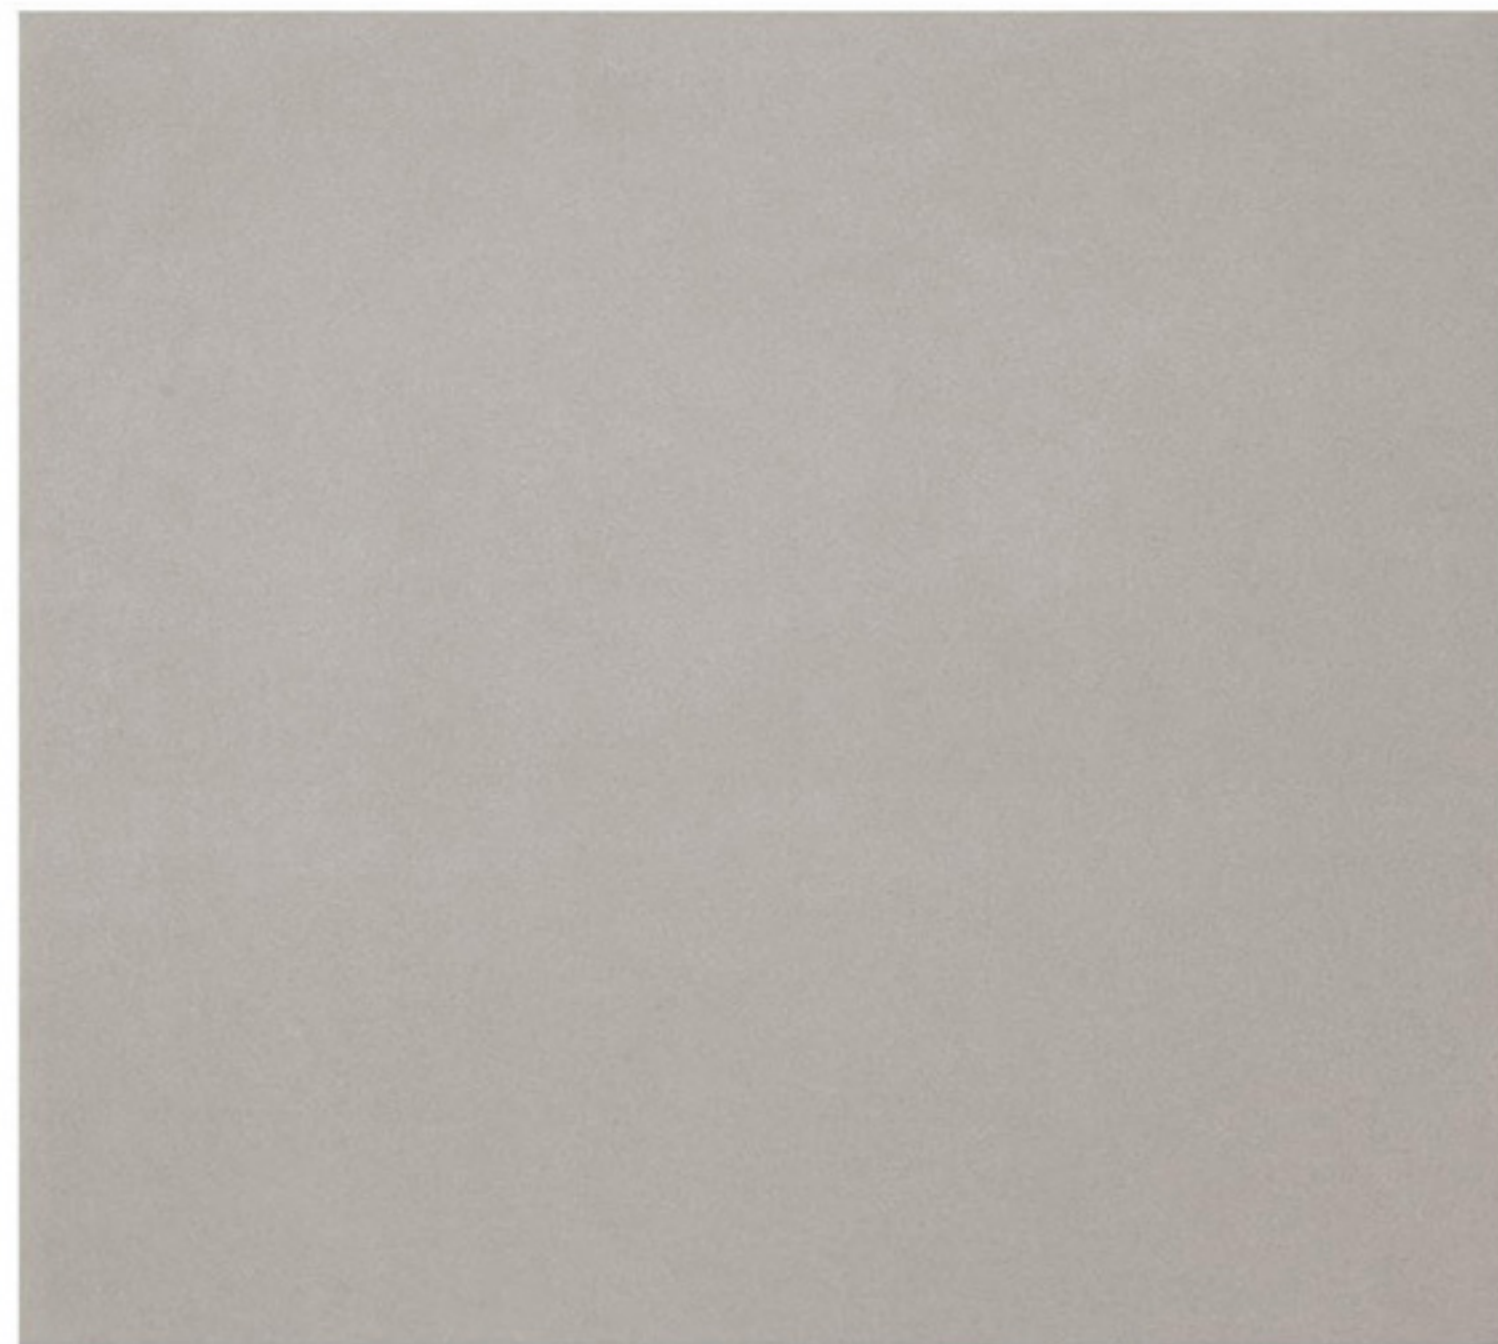

Chrome - 60x60 cm / 24"x24"

TRIM TILES



Battiscopa *
7,2x45 cm / 2.9"x18"



Gradino *
45x45 cm / 18"x18"

* Disponibile in tutti i colori
Available in all colours

Key:

* Frost Resistant

P Polished

W Wall Tile

H Honed / Semi Polished

F Floor Tile

T Textured

M Matt Surface

S Satinato

GL Gloss

G Glass

DIN 51097 barefoot anti-slip rating, measured by the inclined ramp test method, to determine the suitability of flooring materials for mainly wet environments

A Barefoot areas mainly dry

B Barefoot areas bordering shower rooms, pool surrounds not level deck, pool tank floors in non swimmer sections in less than 800mm depth of water

C Barefoot areas including public shower room floors, pool surround floors, pools with walk in beach areas and wave machines

DIN 51130 work-wear foot traffic anti-slip rating, measured by the inclined ramp test method, to determine the suitability of flooring materials for pedestrian and working environments

R9 Work-wear foot traffic with regular static friction - internal dry floor areas

R10 Work-wear foot traffic with above normal static friction - internal mainly dry floor areas, entrance ways and dry change areas, limited external use

R11 Work-wear foot traffic with increased static friction - internal wet and dry floor areas, entrance ways and dry change areas, workshops, food preparation areas, limited external use

R12 Work-wear foot traffic with high static friction - internal wet and dry floor areas, production facilities, mainly wet floor areas and external use

R13 Work-wear foot traffic with very high static friction - internal wet and dry floor areas, production facilities, areas of increased risk of food solids and oil contamination



T:01482 329691 F:01482 212988 E:Info@swedecor.com

www.swedecor.com